


# RD-12M RELAY CARD

## CONNECTION DIAGRAM

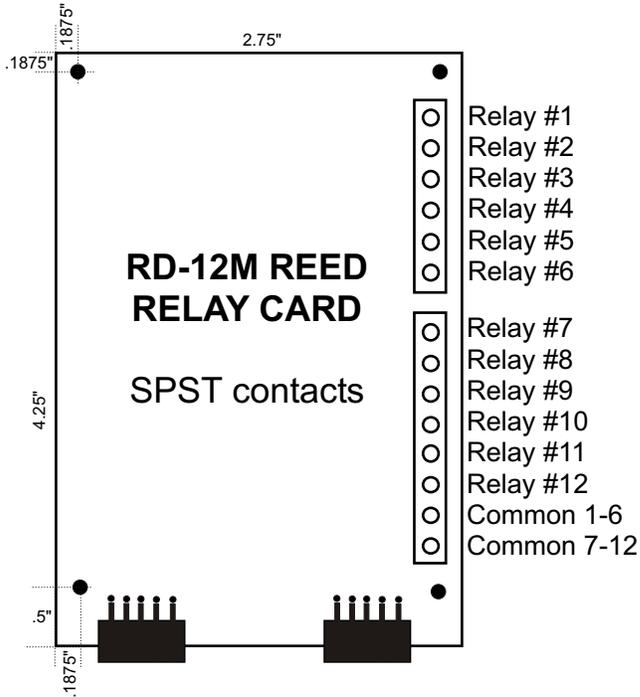

## OPTIONS FOR THE RD-12M

Detachable Terminal Blocks

LED Relay Indicators

Relay Sockets

Please contact Tech Support at  
(937) 349-6000 for more information.

## SPECIFICATIONS RD-12M REED RELAY CARD

Size..... 2.75" by 4.25"  
Weight..... 2.5 ounces  
Number of relays..... 12  
Contact rating (DC)..... 10 VA 200 VDC (resistive)\*  
Contact rating (AC)..... 10 VA 200 V peak (resistive)\*  
Max switching current..... 1/2 amp (under 20V)  
Contacts..... SPST  
Power requirements..... Powered from USB (5V 110ma)  
Terminal block rating..... 125 volts  
Optional heavy duty block.....200 volts  
Mounting holes provided (.125" hole size)

\* not recommended for inductive loads. When used to power external relays, a diode must be connected across the external relay coil (bar to + side). The RYD-8 is recommended for controlling external relays.

Click to see photo: [www.eeci.com/rd-12mp.htm](http://www.eeci.com/rd-12mp.htm)