


RD-8M RELAY CARD

CONNECTION DIAGRAM

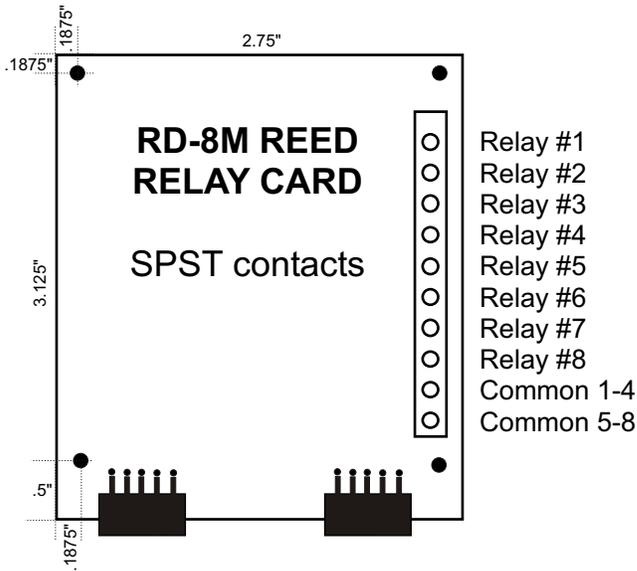

OPTIONS FOR THE RD-8M

Detachable Terminal Blocks

LED Relay Indicators

Relay Sockets

Please contact Tech Support for more information. (937) 349-6000

SPECIFICATIONS RD-8M REED RELAY CARD

Size..... 2.75" by 3.125"
Weight..... 2 ounces
Number of relays..... 8
Contact rating (DC)..... 10 VA 200 VDC (resistive)*
Contact rating (AC)..... 10 VA 200 V peak (resistive)*
Max switching current..... 1/2 amp (under 20V)
Contacts..... SPST
Power requirements..... Powered from USB (5V 80ma)
Terminal block rating..... 125 volts
Optional heavy duty block.....200 volts
Mounting holes provided (.125" hole size)

* not recommended for inductive loads. When used to power external relays, a diode must be connected across the external relay coil (bar to + side). The RYD-8 is recommended for controlling external relays.

Click to see photo: www.eeci.com/rd-8mp.htm