


RH-8 RELAY CARD

CONNECTION DIAGRAM

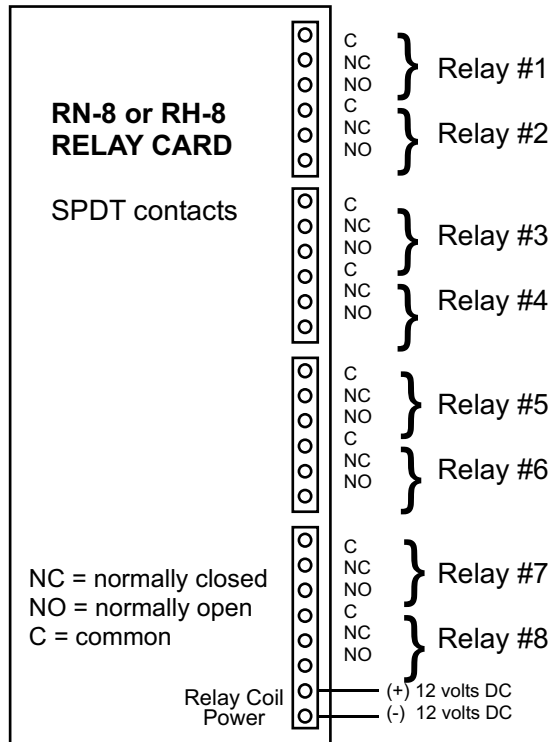

OPTIONS FOR THE RH-8

- TransZorb - Resetting Fuse
- Detachable Terminal Blocks
- LED Relay Indicators
- Relay Sockets
- Detachable Ribbon Cable with Terminal Block in place of fixed ribbon cable
- Please contact Tech Support for more information. (614) 464-4470

SPECIFICATIONS RH-8 RELAY CARD

- Size.....2.75" by 6"
- Weight.....8 ounces
- Number of Relays.....8
- Contact rating (AC).....12 amp 250 VAC (resistive/GP 50K)
- Contact rating (tungston).....TV-3 120VAC 25K
- Contact rating (DC).....10 amp 30 VDC (resistive 50K)
- Contact rating (horsepower)...1/3 HP 120 VAC (motor 6K)
- Contact rating (horsepower)...1/2 HP 240 VAC (motor 6K)
- Contact rating (motor).....48 LRA/10 FLA 240 VAC (motor 30K)
- Contact rating (pilot duty).....A300,720VA 240 VAC (30K)
- Contacts.....SPDT
- Power requirements.....12 volts DC 500ma
- Terminal block rating.....125 volts 13.5A
- Optional heavy duty block.....250 volts 20A