


# RH-8 RELAY CARD

## CONNECTION DIAGRAM

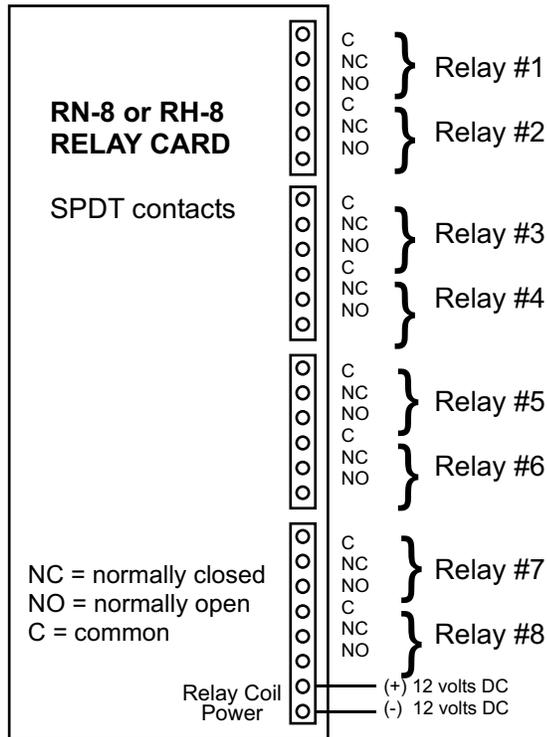

## OPTIONS FOR THE RH-8

TransZorb - Resetting Fuse

Detachable Terminal Blocks

LED Relay Indicators

Relay Sockets

Detachable Ribbon Cable with Terminal Block in place of fixed ribbon cable

Please contact Tech Support at (937) 349-6000 for more information.

## SPECIFICATIONS RH-8 RELAY CARD

Size.....2.75" by 6"  
 Weight.....8 ounces  
 Number of Relays.....8  
 Contact rating (AC).....12 amp 250 VAC (resistive/GP 50K)  
 Contact rating (tungston).....TV-3 120VAC 25K  
 Contact rating (DC).....10 amp 30 VDC (resistive 50K)  
 Contact rating (horsepower)...1/3 HP 120 VAC (motor 6K)  
 Contact rating (horsepower)...1/2 HP 240 VAC (motor 6K)  
 Contact rating (motor).....48 LRA/10 FLA 240 VAC (motor 30K)  
 Contact rating (pilot duty).....A300,720VA 240 VAC (30K)  
 Contacts.....SPDT  
 Power requirements.....12 volts DC 500ma  
 Terminal block rating.....125 volts 13.5A  
 Optional heavy duty block.....250 volts 20A

Click to see photo: [www.eeci.com/rh-8p.htm](http://www.eeci.com/rh-8p.htm)